

# M50

MONOBLOCK VALVE



 **hydro  
control**  
TECHNICAL CATALOGUE

A member of



 **walvoil**  
FLUID POWER EMOTION

**1<sup>st</sup> edition M50.06**

---

*This catalogue shows the product in the most standard configurations.  
Please contact our Sales Dpt. for more detailed information or special requests.*

**WARNING!**

*All specifications of this catalogue refer to the standard product at this date.  
Walvoil, oriented to a continuous improvement, reserves the right to  
discontinue, modify or revise the specifications, without notice.*

**WALVOIL IS NOT RESPONSIBLE FOR ANY DAMAGE CAUSED BY AN  
INCORRECT USE OF THE PRODUCT.**



## Applications

M50 valves have symmetric bodies: thanks to this design it is possible to change the control side in every moment, reversing the spool 180°. These monoblock valves can be easily transformed from right inlet (R) to left inlet (L) and vice versa.

In addition to the high flexibility of other families M50 monoblock valve allows the possibility to choose the control side, thanks to the symmetric body design; it can be easily adapted to many different applications always fitting the specific needs (Cranes and aerial platforms, Compactor, Hook and Skip loaders, Minidumper).

The valve is available with manual, cable, hydraulic remote, pneumatic, electrohydraulic and electropneumatic controls. Dump valve versions are available on request (hydraulic or electric 12 Vdc and 24 Vdc operated).

Special circuits and solutions are available for stabilizers applications. Special spools and options are available for truck mounted crane applications.





## QUICK REFERENCE GUIDE

GENERAL SPECIFICATION	M45	M50	TR55
Working sections number	1 - 6	1 - 7	1 - 7
<b>CIRCUIT</b>			
Parallel	•	•	•
Tandem		•	
Parallel circuit stroke (mm)	5	5,5	5
Float spool extra stroke (mm)	4	4,5	4,5
Spools pitch (mm)	35	35	36
<b>RATED FLOW</b>			
Max recommended flow rate (l/min)	45	50	50
Max recommended flow rate (GPM)	12	15	15
<b>RATED PRESSURE</b>			
Max working pressure (bar)	350	350	350
Max working pressure (PSI)	5000	5000	5000

OPTION CHART	M45	M50	TR55
Direct acting pressure relief valve	•	•	•
Clamping valve			(•)
Externally piloted valve	(•)	(•)	
Solenoid dump valve (12 Vdc)	(•)	(•)	
Solenoid dump valve (24 Vdc)	(•)	(•)	
<b>SPOOL ACTUATION</b>			
Manual control	•	•	•
Without lever	•	•	•
90° joystick control	•	•	•
Hydraulic control		•	•
Direct electric control (12-24 Vdc)		•	
<b>SPOOL RETURN ACTION</b>			
Return spring	•	•	•
Detent in A - in B - in A/B	•	•	•
Detent in 4 <sup>th</sup> position	•	•	•
Arrangement for dual control	•	•	•
Hydraulic load limit	•	•	•
Pneumatic control ON - OFF	•	•	•
Proportional pneumatic control	•	•	•
Electrical load limit	•	•	•
Electrohydraulic control ON-OFF (12-24 Vdc)	•	•	•
Electrohydraulic control PROP. (12-24 Vdc)	•	•	•
Electropneumatic control (12-24 Vdc)	•	•	•
<b>AUXILIARY VALVES</b>			
Valves on port		•	•

(•) = the application requires special machining in the body

**GENERAL INDEX**

<b>4</b>	<b>General specifications</b> Standard working conditions Fluid options
<b>5</b>	<b>Order example</b> Standard thread Painting Hydraulic circuit
<b>7</b>	<b>Dimensions</b>
<b>9</b>	<b>Typical curves</b> Pressure drop (P - T) Pressure drop (P - A/B) Pressure drop (A/B - T) Direct relief valve curve
<b>11</b>	<b>Inlet arrangement</b> Inlet side classification Valve identification Valve arrangement
<b>13</b>	<b>Work section arrangement</b> Spool identification Spool actuation classification Spool return action classification - Spring load values
<b>25</b>	<b>Outlet arrangement</b> Order example - version 1 outlet Order example - HPCO version outlet Outlet with single tank classification Outlet with two tanks classification Carry-over connection (HPCO)
<b>29</b>	<b>M50 Spare parts list</b>
<b>31</b>	<b>Installation</b>
<b>33</b>	<b>General conditions and patents</b>

The specifications detailed in this catalogue show standard products. Special applications are available to order subject to contacting our Engineering Department for an estimate. The data and specifications indicated are to be considered a guide only and Hydrocontrol S.p.A. reserves the right to introduce improvements and modifications without prior notice. Hydrocontrol is not responsible for any damage caused by an incorrect use of the product.



## GENERAL SPECIFICATIONS

## Standard working conditions

Description	Value
Ambient operating temperature range	-40°C / +60°C
Kinematic viscosity range	10 ÷ 300 cSt
Max contamination level	9 (NAS 1638) - 20/18/15 (ISO 4406:1999)
Recommended filtration level	$\beta_{10} > 75$ (ISO 16889:2008)
Internal filter (on electroproportional valves pilot line)	30 $\mu\text{m}$

All information and diagrams in this catalogue refer to a mineral base oil VG46 at 50°C temperature (32 cSt kinematic viscosity)

## Fluid options

Types of fluid (according to ISO 6743/4) Oil and Solutions	Temperature (°C)		Compatible gasket
	min	max	
Mineral Oil HL, HM (or HLP acc. to DIN 51524)	-25	+80	NBR
Oil in water emulsions HFA	+5	+55	NBR
Water in oil emulsions HFB	+5	+55	NBR
Polyglycol-based aqueous solution HFC	-10	+60	NBR

For special applications and different fluids, please call our Technical Department.



**ORDER EXAMPLE**

**M50/1: IRPV 301 150 W001A H001 F001A 01 PA 120 05 PB MJ A G030303**

**TYPE:**

**M50:** product type  
**/1:** working section number

**1) INLET ARRANGEMENT: page 11**

**IRPV 301** inlet side and valve type  
**150** setting (bar)


**2) WORK SECTION ARRANGEMENT: page 13**

2.1 **W001A** spool type  
 2.2 **H001** spool actuation type  
 2.3 **F001A** spool return action type  
 2.4 **01 PA 120** auxiliary valve (port A)  
 2.5 **05 PB** auxiliary valve (port B)

**3) OUTLET ARRANGEMENT: page 25**

**MJA** outlet type  
**G030303** available thread type

Ordering row 2 must be repeated for every work section

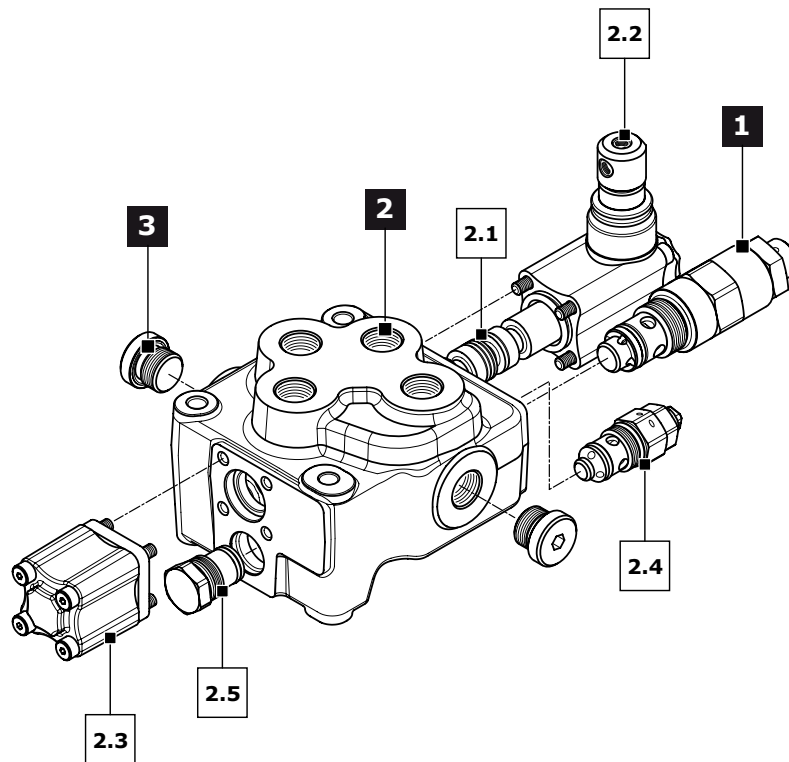

**Standard thread**

The connection ports size is indicated by an ordering code common for all Hydrocontrol products. Following table shows all available connections; for ordering code refer to table on page 32.

Ports	BSP (ISO - 228)	Code	UN-UNF (ISO - 725)	Code
<b>Inlet Port (P)</b>	G 3/8 - G 1/2	<b>G03 - G04</b>	3/4" - 16 UNF	<b>U03</b>
<b>Ports (A - B)</b>	G 3/8 - G 1/2	<b>G03 - G04</b>	3/4" - 16 UNF	<b>U03</b>
<b>Outlet (T) - Carry over (HPCO)</b>	G 3/8 - G 1/2	<b>G03 - G04</b>	3/4" - 16 UNF	<b>U03</b>
<b>Hydraulic Pilot</b>	G 1/4	<b>G02</b>	9/16" - 18 UNF	<b>U02</b>
<b>Pneumatic Pilot</b>	G 1/8	-	NPTF 1/8-27	-



### Painting


On request, all Hydrocontrol valves can be delivered painted (RAL 9005 black primer).

**Order example of M50/1 painted:**

M50/1  
IRPV 301 150  
W001A H001 F001A 01 PA 120 05 PB  
MJA G030303  
**P006/1 N10**

The painting is indicated with the following value:


**P006 - /1 - N10**

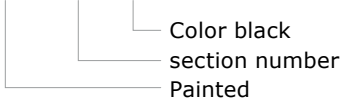

### Hydraulic schematic M50


#### Parallel circuit

When the spool is operated it intercepts the switch gallery by diverting the flow of oil to service port A or B. If two or more spools are actuated at the same time, the oil will power the service port that has the lower load by selecting the path with the least resistance; by throttling the spools, the flow of oil can be divided between two or more service ports.

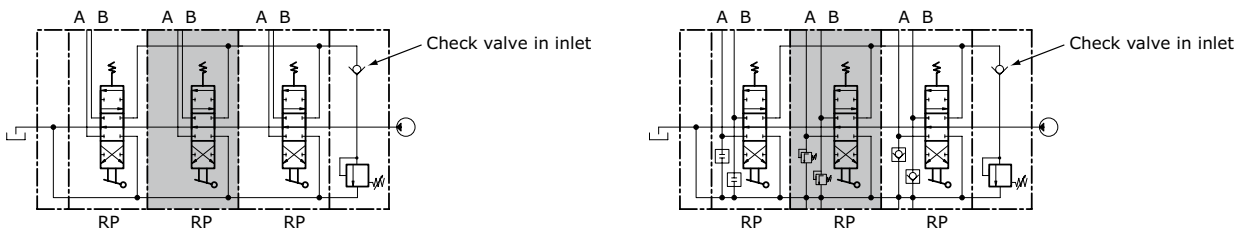

#### Parallel-Tandem circuit

When the spool is operated it intercepts the switch gallery by diverting the flow of oil to service port A or B. The tandem circuit is powered by the switch gallery thus permitting the use of just one work section at a time. The section downstream from the tandem section that has been actuated does not operate, the upstream section has priority.

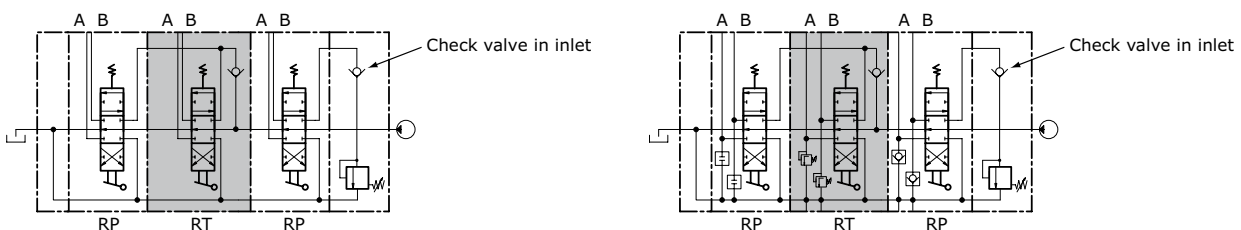






**DIMENSIONS**

**Dimensions M50 (PB-TB)**

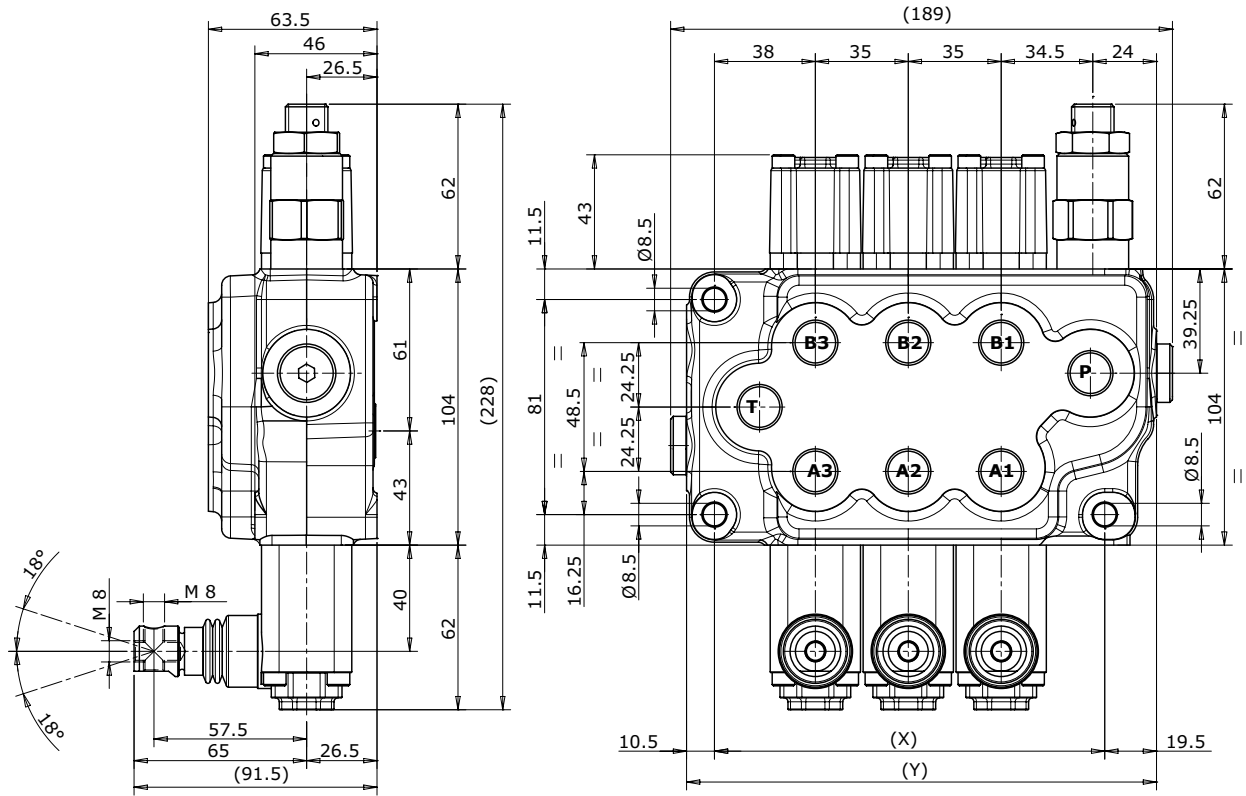


TYPE	M50/1	M50/2	M50/3	M50/4	M50/5	M50/6	M50/7
X (mm)	73	110	147	184	221	258	295
Y (mm)	107	142	177	212	252	292	327
Weights (kg)	3,8	5,5	7,3	9,0	10,8	12,6	14,3

**Fixing specifications:**

HC-M50 PB / HC-M50 TB = N. 3 drills diameter 8,5 (length 46 mm)



Dimensions M50 (PV-TV)

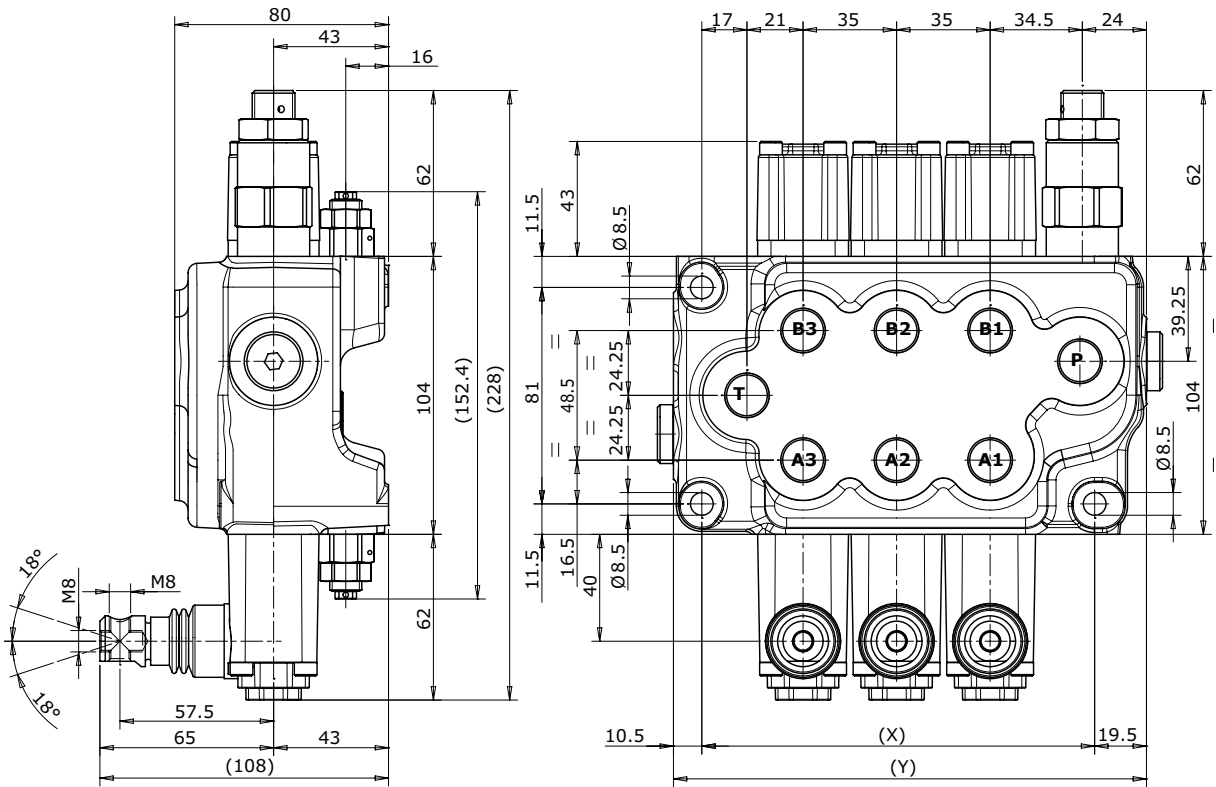

TYPE	M50/1	M50/2	M50/3	M50/4	M50/5	M50/6	M50/7
<b>X (mm)</b>	73	110	147	184	221	258	295
<b>Y (mm)</b>	107	142	177	212	252	292	327
<b>Weights (kg)</b>	4,9	6,8	8,7	10,8	12,7	15,0	16,9

**Fixing specifications:**



HC- M50 PV / HC-M50 TV = N. 3 drills diameter 8,5 (length 63 mm)





**TYPICAL CURVES**

Indicated values have been tested with standard sectional valve and W001A spool.



**Pressure drop (P - T)**

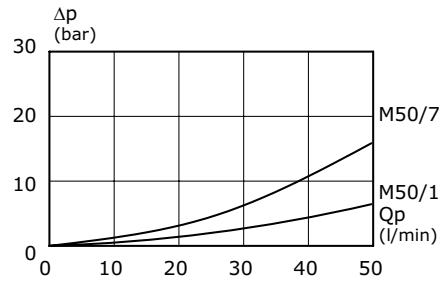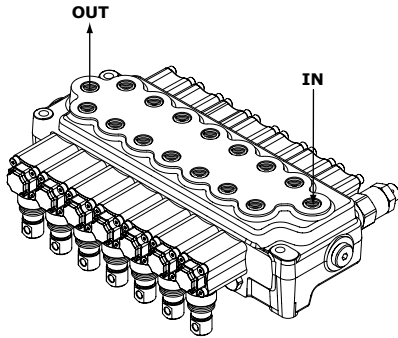

**Pressure drop (P - A/B)**

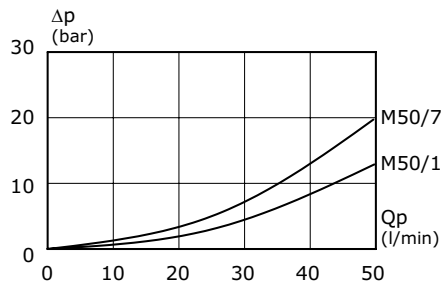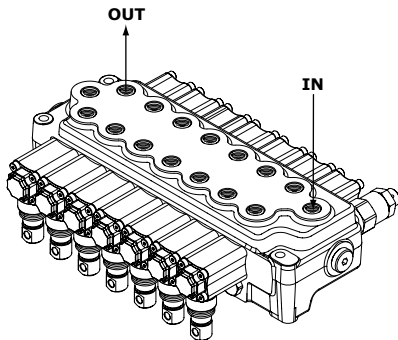


**Pressure drop (A/B - T)**

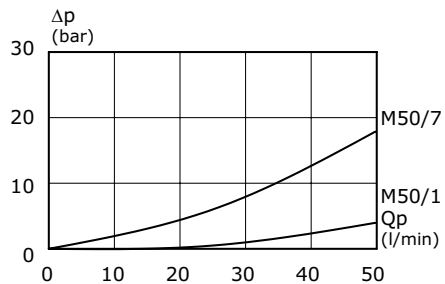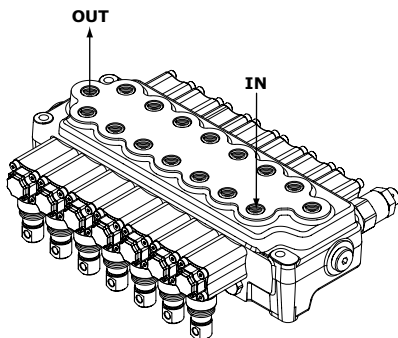

**Direct relief valve curve**

Setting ranges	
type	pressure (bar)
A	20 - 110
B	111 - 220
C	221 - 350

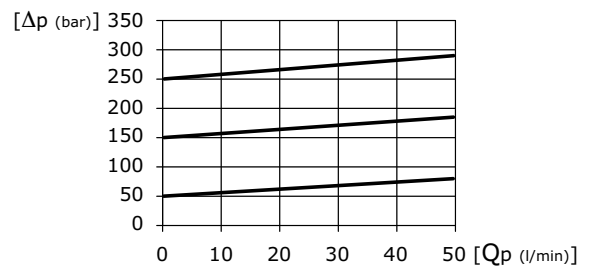





TYPICAL CURVES

Antishock valve curve

Setting ranges		
type	pressure (bar)	
	at full flow	at min. flow
A	20 - 120	
B	121 - 150	
C	151 - 250	91-A / 220-A
D	251 - 350	221-A / 380-A

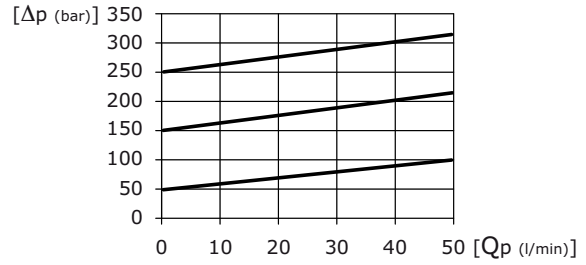

Anticavitation valve curve

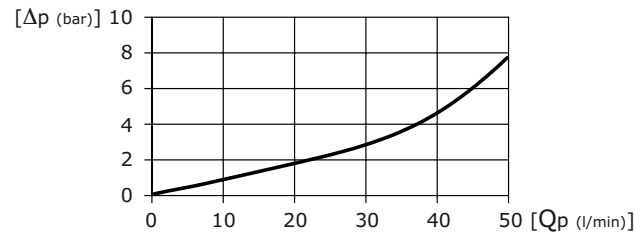



**INLET ARRANGEMENT**

Depending on the circuit type and on the auxiliary valves presence, find four different kinds of models:

Inlet side classification (parallel standard version)			
code	description	schema	configuration
<b>IRPB</b>	Monoblock valve with <b>right</b> inlet section (standard version)		
<b>ILPB</b>	Monoblock valve with <b>left</b> inlet section (standard version)		
<b>IRPV</b>	Monoblock valve with <b>right</b> inlet section (with auxiliary valves)		
<b>ILPV</b>	Monoblock valve with <b>left</b> inlet section (with auxiliary valves)		

Inlet side classification (parallel-tandem version)			
code	description	schema	configuration
<b>IRTB</b>	Monoblock valve with <b>right</b> inlet section (tandem version)		
<b>ILTB</b>	Monoblock valve with <b>left</b> inlet section (tandem version)		
<b>IRTV</b>	Monoblock valve with <b>right</b> inlet section (tandem version with auxiliary valves)		
<b>ILTV</b>	Monoblock valve with <b>left</b> inlet section (tandem version with auxiliary valves)		




Valve identification

type	schema	layout	description	type	schema	layout	description
1			Direct acting pressure relief valve	3			Relief valve plugged

NOTE:

Monoblock valves can be equipped with externally piloted valve, solenoid dump valve (12-24 Vdc), clamping valve. These applications needs a special valve body. Ask our commercial dept. for further informations.

Valve arrangement

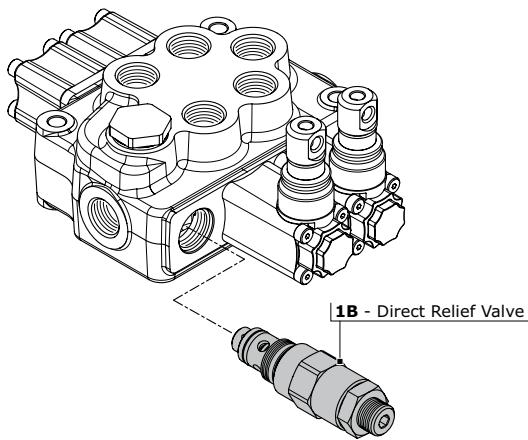

Combination valve example: 301 = 1B

- 301 Combination valve
- 1B Pressure relief valve in port B

The code identifies:

with a number, the type of valve; with a letter its position on the inlet section.

(A) = spool action side (B) = spool return action side

NOTE:

when ordering a main relief valve it is necessary to specify setting (example 150 bar).

valves combination	M50 - IR	M50 - IL
1A	201	•
3A	203	•
1B	301	•
3B	303	•



**WORK SECTION ARRANGEMENT**

**Spool identification**

order example of spool: **W001 A J10**

**W001** spool schema 3 positions double-acting  
**A** spool type spool with 45 l/min inlet flow  
**J10** restricted service ports restriction on diameter (0,10 mm in A and B)

<b>W001</b>	3 positions double-acting	
<b>W002</b>	3 positions double-acting A and B to tank	
<b>W003</b>	3 positions double-acting A to tank B blocked	
<b>W004</b>	3 positions double-acting A blocked B to tank	
<b>W005</b>	3 positions single - acting on A	
<b>W006</b>	3 positions single - acting on B	
<b>W012</b>	4 positions double-acting with float in the 4 <sup>th</sup> position	

spools with restricted service ports				
code	circuit	restriction on diameter (mm)	section (mm <sup>2</sup> )	hydraulic schema
<b>J10</b>	A-B IN T	0,10	2,66	
<b>K10</b>	A IN T	0,10	2,66	
<b>Y10</b>	B IN T	0,10	2,66	



Depending on the inlet flow, it is possible to choose appropriate spool sizes.

CODE	SPOOL TYPE AVAILABLE		
	spool 50 l/min inlet flow	spool 30 l/min inlet flow	spool 15 l/min inlet flow
	A	B	C
<b>W001</b>	W001A	W001B	W001C
<b>W002</b>	W002A	W002B	W002C
<b>W003</b>	W003A	W003A	W003C
<b>W004</b>	W004A	W004A	W004C
<b>W005</b>	W005A	W005B	
<b>W006</b>	W006A	W006B	
<b>W012</b>	W012A		

NOTE:

- W012 spool need a special machining on the valve body.
- Float spool (W012) need special detent kit (F005).
- Different spools are available on request.

Plaese contact our Sales department for more information.





**Spool actuation classification for manual control**

code	description	dimensions	configuration
<b>H001</b>	Protected lever		
<b>H002</b>	Protected lever rotated 180°		
<b>H004</b>	Control without lever		
<b>H019</b>	Protected lever with stroke limiter		
<b>H020</b>	Protected lever rotated 180° with stroke limiter		

**Spool actuation classification for Hydraulic control**

code	description	dimensions	configuration
<b>H005</b> <small>leave out the spool return action code</small>	Hydraulic actuation with side ports  BSP ports = G 1/4 UNF ports = 9/16-18 UNF		



Joystick control classification

The configuration of joystick control interests always two working sections with relative four ports:

**A1 – B1 – A2 – B2.**

For convention:

- section 1 is the first invested from the flow of the oil: it depends from the right or left inlet of the control valve
- Port A = spool action side
- Port B = spool return action side

The position of the fulcrum is identified by a code and stands in four configurations as shown in the following table:

Fulcrum Inlet side	FULCRUM 1 <sup>st</sup> section	FULCRUM 2 <sup>nd</sup> section
RIGHT INLET	<p><b>H009</b></p> <p>Right side inlet fulcrum on 1<sup>st</sup> section (compulsory code for second section: H120)</p>	<p><b>H010</b></p> <p>Right side inlet fulcrum on 2<sup>nd</sup> section (compulsory code for first section: H120)</p>
	<p><b>H011</b></p> <p>Left side inlet fulcrum on 1<sup>st</sup> section (compulsory code for second section: H120)</p>	<p><b>H012</b></p> <p>Left side inlet fulcrum on 2<sup>nd</sup> section (compulsory code for first section: H120)</p>
LEFT INLET	<p><b>H011</b></p> <p>Left side inlet fulcrum on 1<sup>st</sup> section (compulsory code for second section: H120)</p>	<p><b>H012</b></p> <p>Left side inlet fulcrum on 2<sup>nd</sup> section (compulsory code for first section: H120)</p>


The second section concerned the configuration of the joystick control is always identified with code H120. Lever has to be ordered separately.



**Spool return action classification - Springs load values**

Spool return kits have three different spring types; following the codes depending on spring loads.

Spring type			
Type - Code	A (standard spring)	B (soft spring)	C (heavy spring)
<b>Preloading</b>	140 N	130 N	175 N
<b>End of stroke</b>	200 N	170 N	235 N
Spool return action identification example			
Type - Code	<b>F001A</b>	<b>F001B</b>	<b>F001C</b>

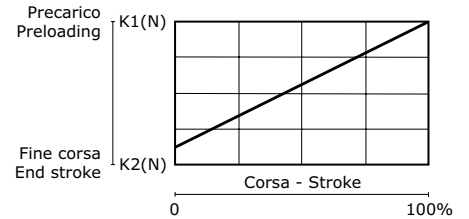

code	description	schema	dimensions	configuration
<b>F001A</b> <b>F001B</b> <b>F001C</b>	3 positions spring-centred spool			
<b>F002A</b>	3 positions spring-centred spool detent in A and B			
<b>F003A</b>	3 positions spring-centred spool detent in A			
<b>F004A</b>	3 positions spring-centred spool detent in B			
<b>F005A</b>	4 positions spring-centred spool detent in 4 <sup>th</sup> position (only for W012 spool)			
<b>F009A</b>	2 positions in A spring-centred spool			
<b>F010A</b>	2 positions in B spring-centred spool			
<b>F011A</b>	2 positions detent in A spring-centred spool			
<b>F012A</b>	2 positions detent in B spring-centred spool			



code	description	schema	dimensions	configuration
<b>F013A</b>	3 positions spring-centred spool prearrangement dual command			
<b>F014A</b>	3 positions spring-centred spool with stroke limiter			
<b>F149</b>	3 positions detent without return spring			

**Pneumatic control classification**

code	description	schema	dimensions	configuration
<b>F020A</b>	Pneumatic control ON - OFF		 Proportional control with port BSP: G 1/8	
<b>F021A</b>	Pneumatic control ON - OFF rotated 180°			
<b>F022A</b>	Proportional Pneumatic control			
<b>F023A</b>	Proportional Pneumatic control rotated 180°			



**Load limit classification**

code	description	schema	dimensions	configuration
<b>F024A</b> <b>F024C</b>	Load limit in A and B			
<b>F025A</b> <b>F025C</b>	Load limit in A and B rotated 180°			
<b>F026A</b> <b>F026C</b>	Load limit in A			
<b>F027A</b> <b>F027C</b>	Load limit in A rotated 180°			
<b>F028A</b> <b>F028C</b>	Load limit in B			
<b>F029A</b> <b>F029C</b>	Load limit in B rotated 180°			

**NOTE:** on request is available the load limit with dual control; for more informations please contact our Commercial Dept.

**Electropneumatic control identification**

code	description	dimensions	configuration
<b>F0620</b>	3 positions electropneumatic control ON-OFF (12 vdc) 7 W - 0,58 A	Minimum working pressure 5 bar	
<b>F0630</b>	3 positions electropneumatic control ON-OFF (24 vdc) 7 W - 0,29 A		

**Control tie rod assembly**

The lenght of the control tie rod, will change depending on the section numbers; in this way it will be easy to install in the right way the sections and avoid any misassembly. Each kit is composed by 1 tie rod and 2 plugs.

**NOTE:** the control tie rod kit has always to be ordered separately.

**Order code for control tie rod:**


- 320103013** = control tie rod /1
- 320102007** = control tie rod /2
- 320102008** = control tie rod /3
- 320102009** = control tie rod /4
- 320102010** = control tie rod /5
- 320102011** = control tie rod /6
- 320102012** = control tie rod /7



**Electrical load limit kit classification**


ELECTRICAL LOAD LIMIT KIT SPECIFICATIONS			
Power supply	Contacts capacity	Protection degree	temperature range
12 vdc	3 A	IP 65	da -25°C a +90°C
24 vdc	1,5 A		

**Operational diagram**

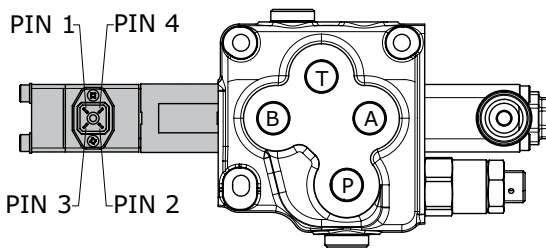

**CONTROL in A e B** = connect PIN 1 - 4 and 2 - 3  
**CONTROL in A** = connect PIN2 - 3  
**CONTROL in B** = connect PIN 1 - 4

**Wiring diagram**

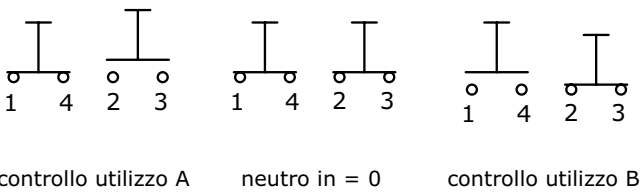

In case of inductive loads it is advisable to connect the terminals of the workport (solenoid) to a 200 VDC - 3A diode.


code	description	dimensions	configuration
<b>F0360</b>	Electrical load limit (normally closed contacts)		
<b>F0370</b>	Electrical load limit rotated 180° (normally closed contacts)		
<b>F0450</b>	Electrical load limit (normally open contacts)		
<b>F0460</b>	Electrical load limit rotated 180° (normally open contacts)		

**NOTE:** a HIRSCHMANN female connector, type G4 W1F, is available on request (code 413000045, to be ordered separately).



**Electrohydraulic control specifications**

Operating temperature range	-20°C / +80°C
Max inlet pressure	350 bar
Reduced pressure	16 bar
Back pressure on (T)	3 bar
Filtering degree	25 μ assoluti
Raccommended pilot pipe size	Ø 6 mm - G 1/4

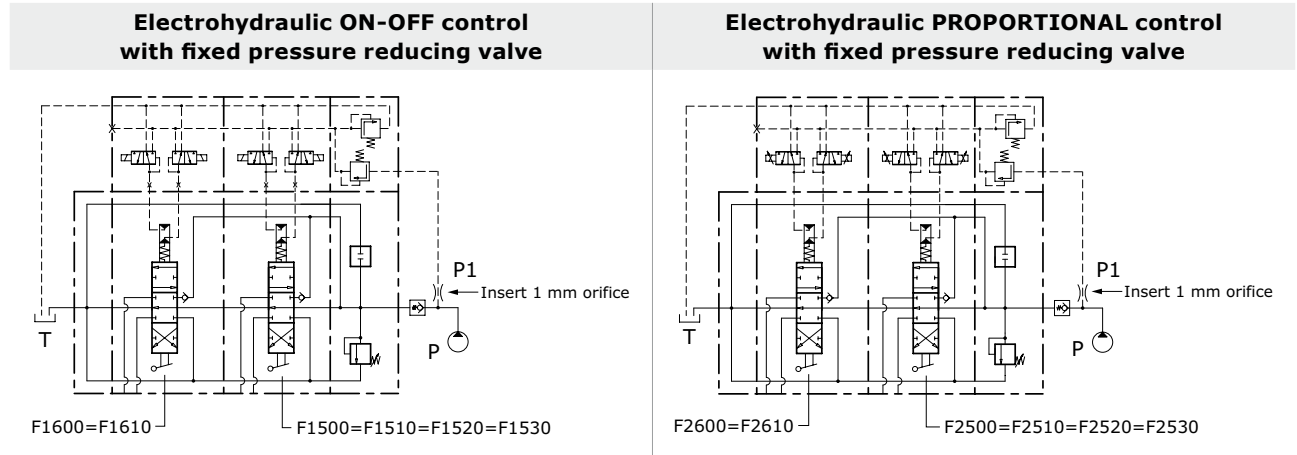

Proportional control kit, mechanically retrooperated, allows the maximum precision of positioning, limiting the hysteresis. The control is operated with PWM control of the current. PWM frequency suggest: 60-80 Hz

REGULATION CURRENTS			
Nominal voltage (V)	Resistance R <sub>20</sub> (Ohm)	Current min (A)	Current max (A)
12 vdc	3,7	0,9	1,7
24 vdc	15,5	0,45	0,85



**Electrohydraulic control classification**

code	description	dimensions	configuration
<b>F1600</b>	3 positions electrohydraulic control ON - OFF 12 Vdc		
<b>F1610</b>	3 positions electrohydraulic control ON - OFF 24 Vdc		
<b>F2600</b>	3 positions electrohydraulic control PROPORTIONAL 12 Vdc		
<b>F2610</b>	3 positions electrohydraulic control PROPORTIONAL 24 Vdc		

Electrohydraulic ON-OFF control is stackable with electrohydraulic PROPORTIONAL control (F2600 = F2610). Control kit already includes orifice to make spool displacement more gradual.



**Electrohydraulic control with fixed pressure reducing valve classification**

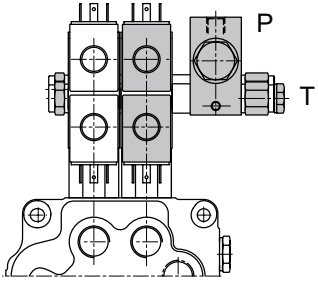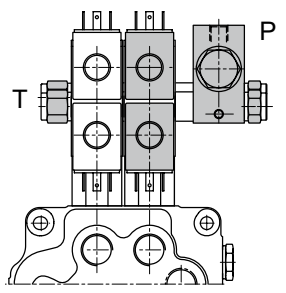code	description	configuration
<b>F1500</b>	Electrohydraulic control ON - OFF (fixed pressure reducing valve) P - T inlet side (12 vdc)	 <p>Port BSP (P - T) = G 1/4 Port UNF (P - T) = 9/16"18 UNF</p>
<b>F1510</b>	Electrohydraulic control ON - OFF (fixed pressure reducing valve) P - T inlet side (24 vdc)	
<b>F2500</b>	Electrohydraulic control PROPORTIONAL (fixed pressure reducing valve) P - T inlet side (12 vdc)	
<b>F2510</b>	Electrohydraulic control PROPORTIONAL (fixed pressure reducing valve) P - T inlet side (24 vdc)	 <p>Port BSP (P - T) = G 1/4 Port UNF (P - T) = 9/16"18 UNF</p>
<b>F1520</b>	Electrohydraulic control ON - OFF (fixed pressure reducing valve) P inlet - T outlet (12 vdc)	
<b>F1530</b>	Electrohydraulic control ON - OFF (fixed pressure reducing valve) P inlet - T outlet (24 vdc)	
<b>F2520</b>	Electrohydraulic control PROPORTIONAL (fixed pressure reducing valve) P inlet - T outlet (12 vdc)	
<b>F2530</b>	Electrohydraulic control PROPORTIONAL (fixed pressure reducing valve) P inlet - T outlet (24 vdc)	

**Control tie rod assembly**

The length of the control tie rod, will change depending on the section numbers; in this way it will be easy to install in the right way the sections and avoid any misassembly. Each kit is composed by 2 tie rods, 2 plugs, 2 connection ports and spacers according to the section number.


**NOTE:** the control tie rod kit has always to be ordered separately.

Reducing valve, combined with electrohydraulic control kit has to be calculated as a normal working section.

**ORDER EXAMPLE:**

Complete valves with 3 sections F1600 requires a complete tie-rod kit /3.

Complete valves with 2 sections F1600 and 1 section with F1500 (reducing valve) requires a complete tie-rod kit /4.

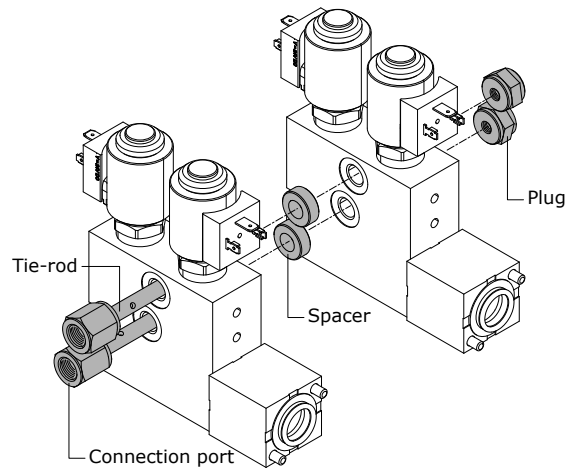

**Order code fixed pressure reducing valve:**

**915000303** = reducing valve for BSP ports

**915000312** = reducing valve for UNF ports

**Order code for control tie rod (BSP):**

**320103001** = control tie rod /1

**320102001** = control tie rod /2

**320102002** = control tie rod /3

**320102003** = control tie rod /4

**320102004** = control tie rod /5

**320102005** = control tie rod /6

**320102006** = control tie rod /7





**Auxiliary valve identification**

code	description	schema	sonfiguration	setting range (bar)			
				type	at full flow	type	at min. flow
<b>01 PA</b>	Antishock valve (port A)			<b>A</b>	20 / 80	<b>A</b>	
				<b>B</b>	81 / 120	<b>B</b>	
				<b>C</b>	121 / 150	<b>C</b>	
				<b>D</b>	151 / 250	<b>D</b>	95-A / 220-A
				<b>E</b>	251 / 350	<b>D</b>	221-A / 350-A
<b>02 PA</b>	Anticavitation valve (port A)						
<b>05 PA</b>	Prearrangement for auxiliary valve (port A)						

code	description	schema	sonfiguration	setting range (bar)			
				type	at full flow	type	at min. flow
<b>01 PB</b>	Antishock valve (port B)			<b>A</b>	20 / 80	<b>A</b>	
				<b>B</b>	81 / 120	<b>B</b>	
				<b>C</b>	121 / 150	<b>C</b>	
				<b>D</b>	151 / 250	<b>D</b>	95-A / 220-A
				<b>E</b>	251 / 350	<b>D</b>	221-A / 350-A
<b>02 PB</b>	Anticavitation valve (port B)						
<b>05 PB</b>	Prearrangement for auxiliary valve (port B)						

**Auxiliary valve - Setting range**

Sections designed to house auxiliary valve option require double choice on work ports A and B. Always indicate setting value when using antishock valve:

- 01 PA (120) = setting at full flow**
- 01 PA (120-A) = setting at min. flow**



Tandem circuit identification

Three different solutions are available for tandem circuit monoblocks:

- tandem circuit on 1<sup>st</sup> section
- tandem circuit on 2<sup>nd</sup> section
- tandem circuit on 1<sup>st</sup> and 2<sup>nd</sup> section

code	description	hydraulic schema
<b>T1</b>	Tandem circuit on 1 <sup>st</sup> section	
<b>T2</b>	Tandem circuit on 2 <sup>nd</sup> section	
<b>T12</b>	Tandem circuit on 1 <sup>st</sup> and 2 <sup>nd</sup> section	

Order example

M50/1:	IRTB 301 150	W001A H001 F001A	<b>MJA T1 G030303</b>
--------	--------------	------------------	-----------------------

**MJA** P - T on the top / top ports A - B

**T1** Tandem circuit on 1<sup>st</sup> section

**G030303** P - T - A - B (thread G 3/8)

NOTE:

choosing a tandem circuit means using a special valve body. For different circuit combinations, ask our Technical-Sales Dpt.




**OUTLET ARRANGEMENT**

This code indicates characteristics for outlet section: ports position and thread, simple T port or HPCO connection. It is possible to have simple T port or two ports configuration for HPCO connection: HPCO allows to extend by-pass channel and connect to a second valve. T ports dimensions and threads depends on the valve size.

**Order example - version 1 Outlet**

M50/1: IRPB 301 150 | W001A H001 F001A | **MJ A G030303**

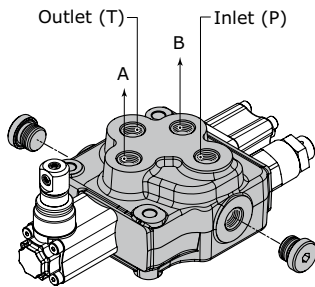


**OUTLET ARRANGEMENT:**

- 1. **MJ** outlet type
- 2. **A G030303** outlet position and available thread type

Rif.	Code	Description	Page
1	<b>MJ</b>	Monoblock valve with single outlet (T) right-side inlet (P)	
	<b>MK</b>	Monoblock valve with single outlet (T) left-side inlet (P)	
2	<b>A G030303</b>	P - T on the top / top ports A - B (thread G 3/8)	26
	<b>A U030303</b>	P - T on the top / top ports A - B (thread 3/4"-16 UNF)	
	<b>C G030303</b>	P - T on sides / top ports A - B (thread G 3/8)	
	<b>C U030303</b>	P - T on sides / top ports A - B (thread 3/4"-16 UNF)	

**Order example - HPCO version Outlet**

M50/1: IRPB 301 150 | W001A H001 F001A | **MM K G030303**

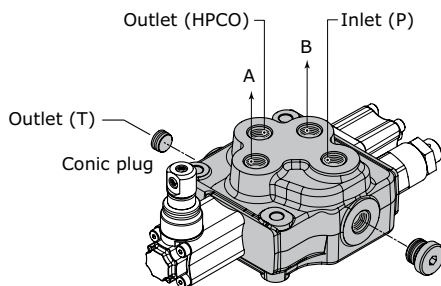

**OUTLET ARRANGEMENT:**

- 1. **MM** outlet type
- 2. **K G030303** outlet position and available thread type

Rif.	Code	Description	Page
1	<b>MM</b>	Monoblock valve with two return (T - HPCO) right-side inlet (P)	
	<b>MN</b>	Monoblock valve with two return (T - HPCO) left-side inlet (P)	
2	<b>A G030303</b>	HPCO on the top / P - T on sides / top ports A - B (thread G 3/8)	27
	<b>A U030303</b>	HPCO on the top / P - T on sides / top ports A - B (thread 3/4"-16 UNF)	
	<b>K G030303</b>	HPCO - P on the top / T on sides / top ports A - B (thread G 3/8)	
	<b>K U030303</b>	HPCO - P on the top / T on sides / top ports A - B (thread 3/4"-16 UNF)	





Outlet with single tank classification

outlet identification



MJ

monoblock valve with single outlet (T)  
right-side inlet (P)

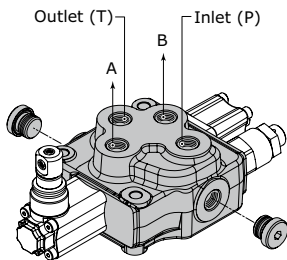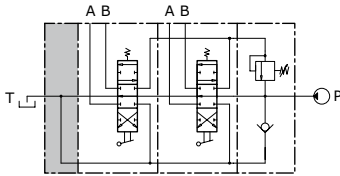

MK


monoblock valve with single outlet (T)  
left-side inlet (P)

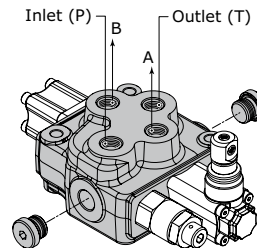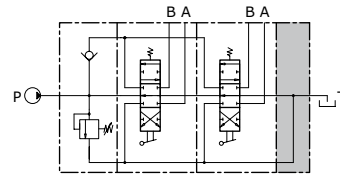

Outlet position


outlet combination and thread available

A G030303

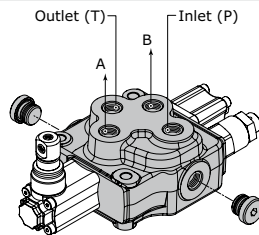


P - T on the top  
top ports A - B  
(thread G 3/8)

A U030303

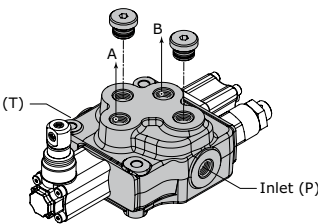


P - T on the top  
top ports A - B  
(thread 3/4" - 16 UNF)

C G030303

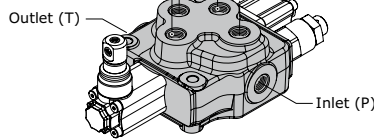


P - T on sides  
top ports A - B  
(thread G 3/8)

C U030303

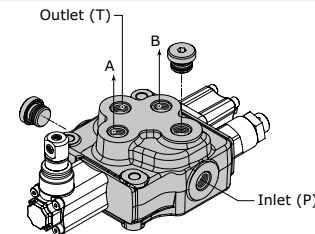


P - T on sides  
top ports A - B  
(thread 3/4" - 16 UNF)

K G030303

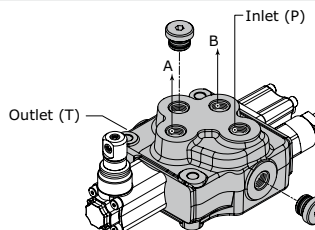


P on side - T on the top  
top ports A - B  
(thread G 3/8)

K U030303

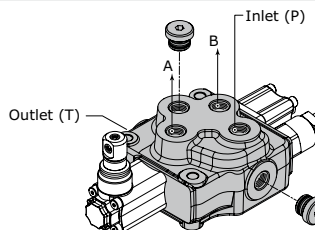


P on side - T on the top  
top ports A - B  
(thread 3/4" - 16 UNF)

L G030303

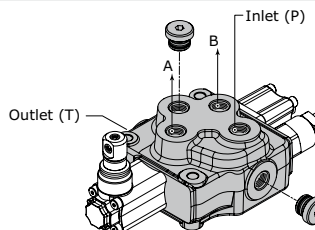

P on the top - T on side  
top ports A - B  
(thread G 3/8)

L U030303

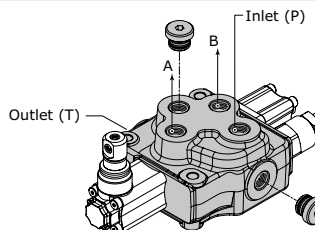

P on the top - T on side  
top ports A - B  
(thread 3/4" - 16 UNF)



Outlet with two tanks classification

outlet identification	
<b>MM</b>	<p>monoblock valve with two return (T-HPCO) right-side inlet (P)</p>
<b>MN</b>	<p>monoblock valve with two return (T-HPCO) left-side inlet (P)</p>


Outlet position

outlet combination and thread available	
<b>A G030303</b>	<p>HPCO on the top P - T on sides top ports A - B (thread G 3/8)</p>
<b>A U030303</b>	<p>HPCO on the top P - T on sides top ports A - B (thread 3/4" - 16 UNF)</p>
<b>K G030303</b>	<p>HPCO - P on the top T on side top ports A - B (thread G 3/8)</p>
<b>K U030303</b>	<p>HPCO - P on the top T on side top ports A - B (thread 3/4" - 16 UNF)</p>




**CARRY-OVER CONNECTION (HPCO)**

This option, available on all M45, allows the sectional valve to feed a second valve, by extending the free flow channel. In this configuration, the valve need a separated port for connection to tank.

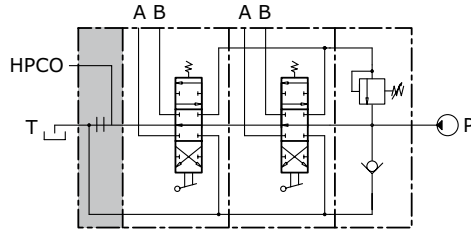


It is possible to transform monoblock valve from standard to HPCO version just by ordering the appropriate conic plug:

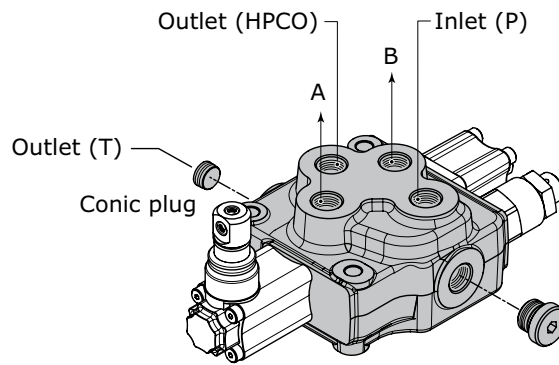

code (HPCO Plug identification)	description	q.ty
413010210	conic plug 1/4" x 6,5	1



**M50 SPARE PARTS LIST**

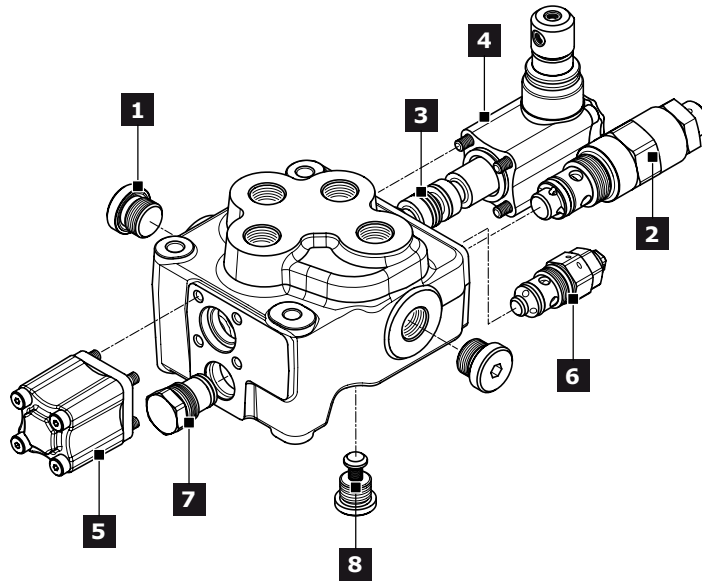

Ref.	Description	Order code	Q.ty	Code	Note
<b>1</b>	Plug kit (G 3/8)	<b>430000018</b>	1	<b>G03</b>	
	Plug kit (G 1/2)	<b>430000019</b>		<b>G04</b>	
	Plug kit (3/4" - 16 UNF)	<b>300001006</b>		<b>U03</b>	
	Relief valve plugged	<b>430172001</b>			
<b>2</b>	Direct acting pressure relief valve (*)	<b>57548</b>	1		Setting: 100 bar
		<b>43151</b>			Setting: 200 bar
		<b>47555</b>			Setting: 300 bar
<b>3</b>	3 positions double-acting spool (50 l/min)	<b>421259017</b>	1	<b>W001A</b>	fo protected lever
		<b>421259018</b>			for without lever
		<b>421259052</b>			for hydraulic actuation
	3 positions double-acting spool (30 l/min)	<b>421259045</b>		<b>W001B</b>	for protected lever
		<b>421259012</b>			for without lever
		<b>421259015</b>			for hydraulic actuation
	3 positions double-acting spool (15 l/min)	<b>421259016</b>		<b>W001C</b>	for protected lever
	3 positions double-acting A and B to tank spool (50 l/min)	<b>421259019</b>		<b>W002A</b>	for protected lever
		<b>421259068</b>			for without lever
3 positions double-acting A and B to tank spool (30 l/min)	<b>421259088</b>	<b>W002B</b>	for hydraulic actuation		
	<b>421259046</b>		for protected lever		
3 positions double-acting A and B to tank spool (15 l/min)	<b>421259014</b>	<b>W002C</b>	for without lever		
	<b>421259089</b>		for hydraulic actuation		
4 positions double-acting with float in the 4 <sup>th</sup> pos. (50 l/min)	<b>421259043</b>	<b>W002C</b>	for protected lever		
	<b>421259020</b>	<b>W012A</b>	for protected lever		
<b>4</b>	Protected lever	<b>320359006</b>	1	<b>H001 = H002</b>	only for W012 spool
		<b>320359002</b>			
	Control without lever	<b>320359003</b>	1	<b>H004</b>	
	Hydraulic actuation	<b>320503001</b>	2	<b>H005</b>	BSP version
		<b>320503010</b>			UNF version
	Protected lever with stroke limiter	<b>320359008</b>	1	<b>H019 = H020</b>	
Joystick control	<b>320659001</b>	1	<b>H009 = H012</b>		
	<b>320659002</b>		<b>H010 = H011</b>		
<b>5</b>	3 position spring centred spool	<b>320759005</b>	1	<b>F001A</b>	
	Detent in A and B	<b>320859002</b>		<b>F002A</b>	
	Detent in A	<b>320859004</b>		<b>F003A</b>	
	Detent in B	<b>320859005</b>		<b>F004A</b>	
	Detent in 4 <sup>th</sup> position	<b>320859003</b>		<b>F005A</b>	only for W012 spool
	Prearrangement dual command	<b>320759008</b>		<b>F013A</b>	
	Pneumatic control ON-OFF	<b>321159001</b>		<b>F020A = F021A</b>	
	Proportional pneumatic control	<b>321259001</b>		<b>F022A = F023A</b>	BSP ports



Ref.	Description	Order code	Q.ty	Code	Note
<b>6</b>	Load limit in A and B	<b>320059001</b>		<b>F024A = F025A</b>	
	Load limit in A	<b>320059003</b>		<b>F026A = F027A</b>	
	Load limit in B	<b>320059004</b>		<b>F028A = F029A</b>	
	Electrical load limit (normally closed contacts)	<b>320059002</b>		<b>F0360 = F0370</b>	
	Electrical load limit (normally open contacts)	<b>320059006</b>		<b>F0450 = F0460</b>	
	Electrohydraulic ON - OFF (12 vdc)	<b>321459001</b>		<b>F1600</b>	
	Electrohydraulic ON - OFF (24 vdc)	<b>321459002</b>		<b>F1610</b>	
	Electrohydraulic Proportional (12 vdc)	<b>322059001</b>	1	<b>F2600</b>	
	Electrohydraulic Proportional (24 vdc)	<b>322059002</b>		<b>F2610</b>	
	Electrohydraulic ON - OFF (12 vdc) with reducing valve	<b>321459003</b>		<b>F1500 = F1520</b>	BSP ports
	Electrohydraulic ON - OFF (24 vdc) with reducing valve	<b>321459004</b>		<b>F1510 = F1530</b>	
	Electrohydraulic ON - OFF (12 vdc) with reducing valve	<b>321459006</b>		<b>F1500 = F1520</b>	UNF ports
	Electrohydraulic ON - OFF (24 vdc) with reducing valve	<b>321459007</b>		<b>F1510 = F1530</b>	
	Electrohydraulic Proportional (12 vdc) with reducing valve	<b>322059003</b>		<b>F2500 = F2520</b>	BSP ports
	Electrohydraulic Proportional (24 vdc) with reducing valve	<b>322059004</b>		<b>F2510 = F2530</b>	
	Electrohydraulic Proportional (12 vdc) with reducing valve	<b>322059011</b>		<b>F2500 = F2520</b>	UNF ports
Electrohydraulic Proportional (24 vdc) with reducing valve	<b>322059012</b>		<b>F2510 = F2530</b>		
		<b>34155</b>			setting: 100 bar
Antishock valve on port A		<b>36582</b>		<b>01 PA</b>	setting: 200 bar
		<b>82475</b>	1		setting: 300 bar
	Anticavitation valve on port A	<b>915080401</b>		<b>02 PA</b>	
Prearrangement for auxiliary valve on porta A	<b>430404001</b>		<b>05 PA</b>		
		<b>34155</b>			setting: 100 bar
Antishock valve on port B		<b>36582</b>		<b>01 PB</b>	setting: 200 bar
		<b>82475</b>	1		setting: 300 bar
	Anticavitation valve on port B	<b>915080401</b>		<b>02 PB</b>	
Prearrangement for auxiliary valve on porta B	<b>430404001</b>		<b>05 PB</b>		
Check valve	<b>320259003</b>		1		





## INSTALLATION


### Guidelines

- Mount the control valve securely to a flat surface (recommended 3 point fixing); at the time do not use a hammer to positioning by hitting.
- When handling the monoblock valve, be careful not hold the pilot cover or return spring cap of the spool or accessory valves such as main relief valves.
- Clean piping materials sufficiently before use.
- Make sure to prevent the port openings from being entered with dust or foreign matters.
- Tighten the port connectors surely with the recommended fastening torques.
- Do not direct the jet of a pressure washing unit directly to the valve.

### Fittings tightening torque (Nm)

thread type	port P	Port A - B	Port T/HPCO
<b>BSP (ISO - 228)</b>	<b>G 3/8</b>	<b>G 3/8</b>	<b>G 3/8</b>
with rubber sealing (DIN 3869)	40	40	40
with copper or steel and rubber washer	40	40	40
<b>BSP (ISO - 228)</b>	<b>G 1/2</b>	<b>G 1/2</b>	<b>G 1/2</b>
with rubber sealing (DIN 3869)	60	60	60
with copper or steel and rubber washer	60	60	60
<b>UN-UNF (ISO - 725)</b>	<b>3/4" - 16 UNF</b>	<b>3/4" - 16 UNF</b>	<b>3/4" - 16 UNF</b>
with O.R.	40	40	40

### General Clamping torque (Nm)

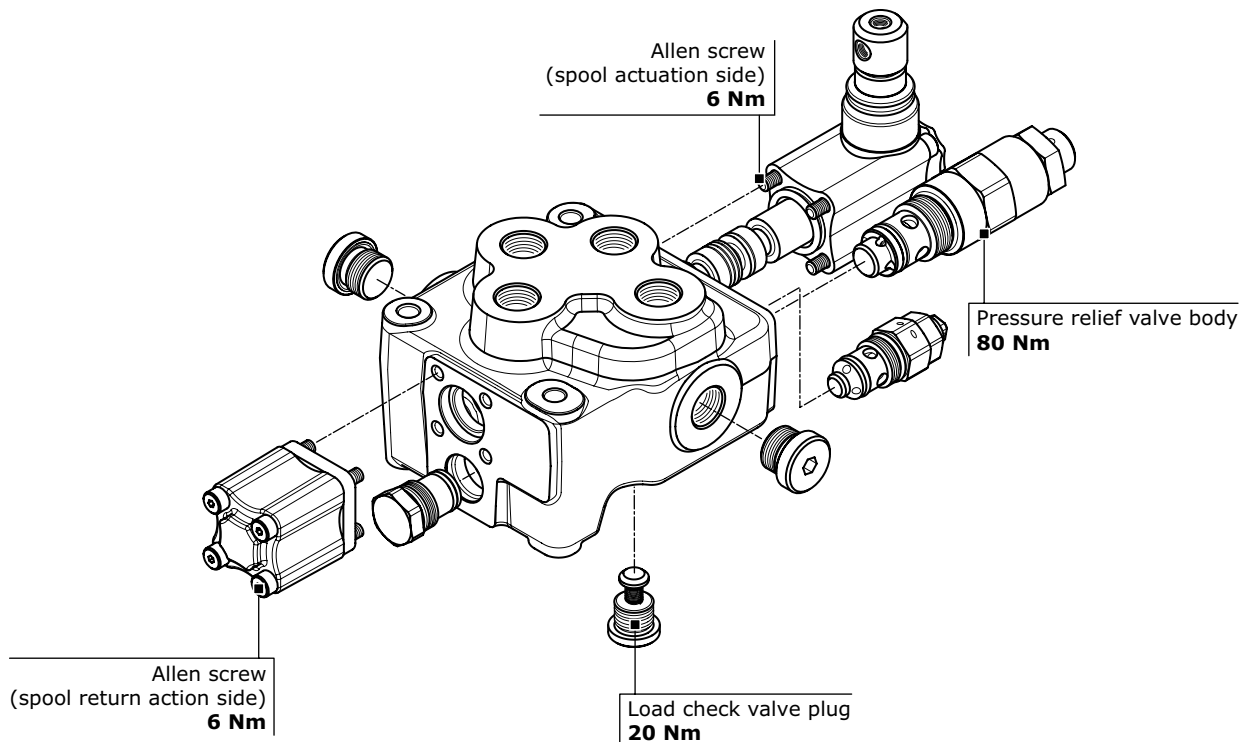



**Dimensions - Thread codes**


The connection ports size is indicated by an ordering code common for all Hydrocontrol products. Following table shows all available connections.

<b>METRIC THREAD (ISO 9974-1)</b>			
Type	M18x1,5	M22x1,5	M27x2
Code	<b>M01</b>	<b>M02</b>	<b>M03</b>

<b>BSP THREAD (ISO 1179-1)</b>								
Type	1/4"	3/8"	1/2"	3/4"	1"	1"1/4	1"1/2	2"
Code	<b>G02</b>	<b>G03</b>	<b>G04</b>	<b>G05</b>	<b>G06</b>	<b>G07</b>	<b>G08</b>	<b>G09</b>

<b>UN / UNF THREAD (ISO 11926-1)</b>						
Type	9/16" 18 UNF SAE6	3/4" 16 UNF SAE8	7/8" 14 UNF SAE10	1"1/16 12 UNF SAE12	1"5/16 12 UNF SAE16	1"5/8 12 UNF SAE20
Code	<b>U02</b>	<b>U03</b>	<b>U04</b>	<b>U05</b>	<b>U06</b>	<b>U07</b>

**Dimensions - SAE Flange codes**

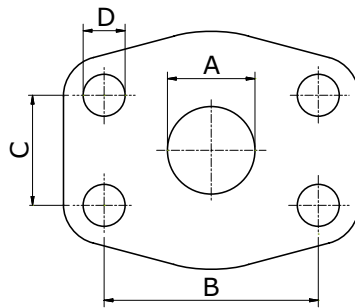

<b>SAE / 3000 FLANGE (ISO 6162-1)</b>												
Type	3/4" (MA)	3/4" (UNC)	1" (MA)	1" (UNC)	1"1/4 (MA)	1"1/4 (UNC)	1"1/2 (MA)	1"1/2 (UNC)	2" (MA)	2" (UNC)	3" (MA)	3" (UNC)
Code	<b>S03</b>	<b>S04</b>	<b>S05</b>	<b>S06</b>	<b>S07</b>	<b>S08</b>	<b>S09</b>	<b>S10</b>	<b>S11</b>	<b>S12</b>	<b>S15</b>	<b>S16</b>
A	19	19	25	25	32	32	38	38	51	51	76	76
B	47,6	47,6	52,4	52,4	58,7	58,7	69,9	69,9	77,8	77,8	106,4	106,4
C	22,3	22,3	26,2	26,2	30,2	30,2	35,7	35,7	42,9	42,9	61,9	61,9
D	M10	3/8-16	M10	3/8-16	M10	7/16-14	M12	1/2-13	M12	1/2-13	M16	5/8-11


<b>SAE / 6000 FLANGE (ISO 6162-2)</b>								
Type	3/4" (MA)	3/4" (UNC)	1" (MA)	1" (UNC)	1"1/4 (MA)	1"1/4 (UNC)	1"1/2 (MA)	1"1/2 (UNC)
Code	<b>S33</b>	<b>S34</b>	<b>S35</b>	<b>S36</b>	<b>S37</b>	<b>S38</b>	<b>S39</b>	<b>S40</b>
A	19	19	25	25	32	32	38	38
B	50,8	50,8	57,2	57,2	66,6	66,6	79,3	79,3
C	23,8	23,8	27,8	27,8	31,8	31,8	36,5	36,5
D	M10	3/8-16	M12	7/16-14	M14	1/2-13	M16	5/8-11



## GENERAL CONDITIONS AND PATENTS

### Product identification

All Hydrocontrol products have an identifying plate placed in specific position.

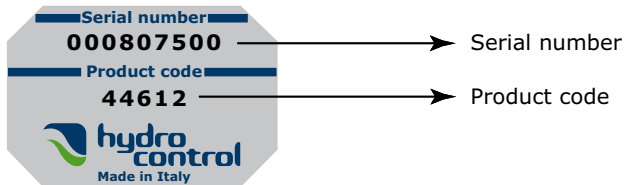

#### Serial number:

It univocally identifies the physical valve: this provides an easy way to find all sales and production details.

#### Product code:

It is a number univocally identifying the configuration and pressure settings of a valve.

### Introduction

These general conditions apply to all general supplies from Hydrocontrol s.p.a., after receiving orders from the Customer. Should commercial terms such as EXW, DDP, etc be mentioned, of course the Incoterms of the International Chamber of Commerce must be referred to, according to the test existing when the general supply conditions are agreed on.

### Management of orders

No Customer's order is binding to Hydrocontrol s.p.a. if Hydrocontrol s.p.a. has not confirmed the order in writing. Hydrocontrol s.p.a. commits to supplying the orders in compliance with the order confirmation that has been issued. Any disagreement with the content of the order confirmation must be communicated in writing to Hydrocontrol s.p.a. within and no later than 5 days from the delivery of the order confirmation. The Customer commits to paying for the goods supplied by Hydrocontrol s.p.a., according to the prices indicated on the order confirmation.

### Payment conditions

The Parties agree on the payment terms at the beginning of the supply. The terms will be indicated on the order confirmation. Should the Customer be late with the payments, Hydrocontrol S.p.a. will be entitled to require the payment of interests on arrears based on the exiting Prime Rate increased by 2%. Should there be any payment delay, Hydrocontrol s.p.a. will be entitled not to process the Customer's purchase order, even if it has already been confirmed.

### Delivery and shipment

The goods are always supplied Ex Works, even when Hydrocontrol s.p.a. agrees with the Customer that the shipment, or a part of it, will be arranged by Hydrocontrol s.p.a. It is agreed that the Customer will bear the risk of goods deterioration or damaging from the moment the goods are handed by Hydrocontrol s.p.a. to the first carrier.

### Product characteristics

Hydrocontrol s.p.a. commits to supplying good quality products, compliant with the technical specifications declared on the technical tables and on the catalogue. Hydrocontrol s.p.a, even without notice, at its own discretion, reserves the right to modify the products as necessary, without these changes altering the main characteristics of the products.

### Claims

Any claims about defects on delivered products (just as an example: claims about the packaging, the number, the quantity or the external product characteristics) will have to be notified to Hydrocontrol s.p.a. in writing, within and no later than 7 days from reception of the goods, otherwise the claims will be considered as null and void. Occult defects (the defects of the goods that cannot be spotted with a careful control of the goods received by the Customer), will have to be notified in writing to Hydrocontrol s.p.a. within 7 days from the discovery of the defect, and anyhow no later than 12 months from the delivery of the goods, otherwise the claim will be considered as null and void. Even in case of claim or objection, the Customer will never be entitled to suspend or delay the payments to Hydrocontrol s.p.a. for the products subject to claim or objection nor for any other supply.

**GENERAL CONDITIONS AND PATENTS****Warranty**

Should the products supplied by Hydrocontrol not be compliant or have the required quality and should this defect be due to Hydrocontrol, Hydrocontrol s.p.a. commits, at its choice, to replace or repair the faulty products, as long as the defect or lack of compliance is notified to Hydrocontrol s.p.a. in writing, as specified at point 6, within and no later than 18 months from product delivery. On the products that have been fixed or replaced in accordance with what specified above, the above-mentioned warranty applies. The 12 month duration starts from the date of repair or replacement. In case of defects, lack of quality or in case of lack of compliance for the supplied products, with the exception of fraud or serious offence, Hydrocontrol s.p.a. only commits to repairing or replacing the faulty products, according to what specified above. This warranty replaces any other Supplier's warranty or liability established by the law. This warranty excludes any other liability contractual or extra-contractual by Hydrocontrol s.p.a. on the products supplied by Hydrocontrol (as a mere example: damage refund, loss of profit, product recall campaign, etc). Hydrocontrol s.p.a. has signed a product civil liability police, with a suitable maximum coverage.

**Ownership retention**

The products supplied by Hydrocontrol s.p.a. will be owned by the latter until Hydrocontrol receives the complete payment for the supplied goods.

**Obligation confidentiality**

Hydrocontrol s.p.a. commits to not disclosing the technical and commercial information it receives from the Customer, unless this information has already been publicly disclosed.

**Patents**

The Customer is not allowed to use the provided Products, or a part of them, their descriptions or drawings protected or not protected by Patent or registered trademark in order to design or make similar products, unless Hydrocontrol s.p.a. previously issues its written authorization. Should Hydrocontrol s.p.a. give its written authorization, all patents, trademarks, registered designs, copyrights and intellectual property rights related or connected to the Products provided by Hydrocontrol s.p.a. will stay Hydrocontrol's property. The Customer commits to respecting the highest confidentiality.

**Applicable law and court of jurisdiction**

Hydrocontrol s.p.a.'s supplies are regulated by these General Supply Conditions and, for anything not defined here, by the Italian law. Any controversy related, generated or connected to the supply of Products by Hydrocontrol s.p.a., where Hydrocontrol s.p.a. is involved, will be exclusively dealt with by the Court of Bologna.

**Walvoil nel mondo - Walvoil worldwide**

**Sede principale, Filiali e Uffici di rappresentanza**  
*Headquarters, Subsidiaries and Representative Offices*

**Walvoil S.p.A. - Sede principale - Headquarters**

Via Adige, 13/D . 42124 Reggio Emilia . Italy  
TEL. +39 0522 932411 . info@walvoil.com . www.walvoil.com

**Business Unit Hydrocontrol**

Via Natale Salieri, 6 . 40024  
Castel S. Pietro Terme . Bologna . Italy  
TEL. +39 051 6959411

**Galtech Site**

Via Portella della Ginestra, 10 . 42025 Cavriago  
Zona Industriale Corte Tegge . Reggio Emilia . Italy  
TEL. +39 0522 932411

AUSTRALASIA . *AUSTRALASIA*

**Walvoil Fluid Power Australasia Pty Ltd**

13 Vanessa Way . Delahey VIC 3037 . Melbourne . Australia  
TEL. +61 458 918 750 . australasia@walvoil.com

BRASILE . *BRAZIL*

**Interpump Hydraulics Brasil Ltda - Walvoil Division**

Gilberto de Zorzi, 525 . Forqueta Caxias do Sul (RS)  
TEL. +55 54 3223 2373 . infobrasil@walvoil.com

CANADA . *CANADA*

**Galtech Canada Inc.**

3100, Jacob Jordan . Terrebonne . Qc J6X 4J6 . Canada  
TEL. +1 450 477 1076 Ext:225 . info@galtechcanada.com

CINA . *CHINA*

**Walvoil Fluid Power (Dongguan) Co. Ltd**

1st Floor, the Third Factory Area, Sijia, Shijie Town, Dongguan City, Guangdong province, China.  
TEL. +86 769 81816189-8020 . FAX. +86 769 81816589  
info@walvoil.com.cn . www.walvoil.com.cn

COREA DEL SUD . *SOUTH KOREA*

**Walvoil Fluid Power Korea Ltd.**

80-15, Oseongsandan 1Ro,  
Oseong-Myun, Pyungtaek, Kyungki .  
Korea 451-872 . TEL. +82 31 682 6030  
info@walvoil.co.kr . www.walvoil.co.kr

FRANCIA . *FRANCE*

**Walvoil Fluid Power France**

362 rue de Bretagne . Vritz . 44540 Vallons-de-l'Erdre  
TEL. +33 2 41 94 41 06 . france@walvoil.com

INDIA . *INDIA*

**Walvoil Fluid Power (India) PVT. LTD.**

No. 19, 2nd Cross, 2nd Main, KIADB Industrial Area, Attibele,  
Anekal Taluk, Bangalore - 562107 . TEL. +91 80 0614 24000 info@walvoil.co.in . www.walvoil.co.in

U.S.A. . *U.S.A.*

**Walvoil Fluid Power Corp.**

4111 North Garnett Tulsa, OK 74116, USA  
TEL. +1 918 858 7100 . info@walvoilusa.com .  
www.walvoilusa.com

**Walvoil Fluid Power Corp. Hydrocontrol Business Unit**

1109, Technology Drive . Red Wing . MN 55066 . U.S.A.  
TEL. +1 651 212 6400 . info@walvoilusa.com .  
www.walvoilusa.com

1<sup>st</sup> edition M50.06

[www.walvoil.com](http://www.walvoil.com)



D1WHEA02E

