
Developed by Walvoil and Dieci, the ALS system won the Technical Innovation Contest" of EIMA Digital Preview 2020 last November.



field of telehandlers, won both the prestigious **Technical Innovation 2020–21 Award**, dedicated to machines and devices with features of "absolute innovation", and the **Blu Award 2020–21**, attributed to the solutions that outstand for environmental aspects.

Walvoil, now part of Interpump Group and Dieci, important player in the

The ALS (Adaptive Load Sensing) minimizes the dispersion of energy in the hydraulic system of telehandlers, considerably improving the efficiency of the vehicle and consequently obtaining a reduction in wear and consumption.

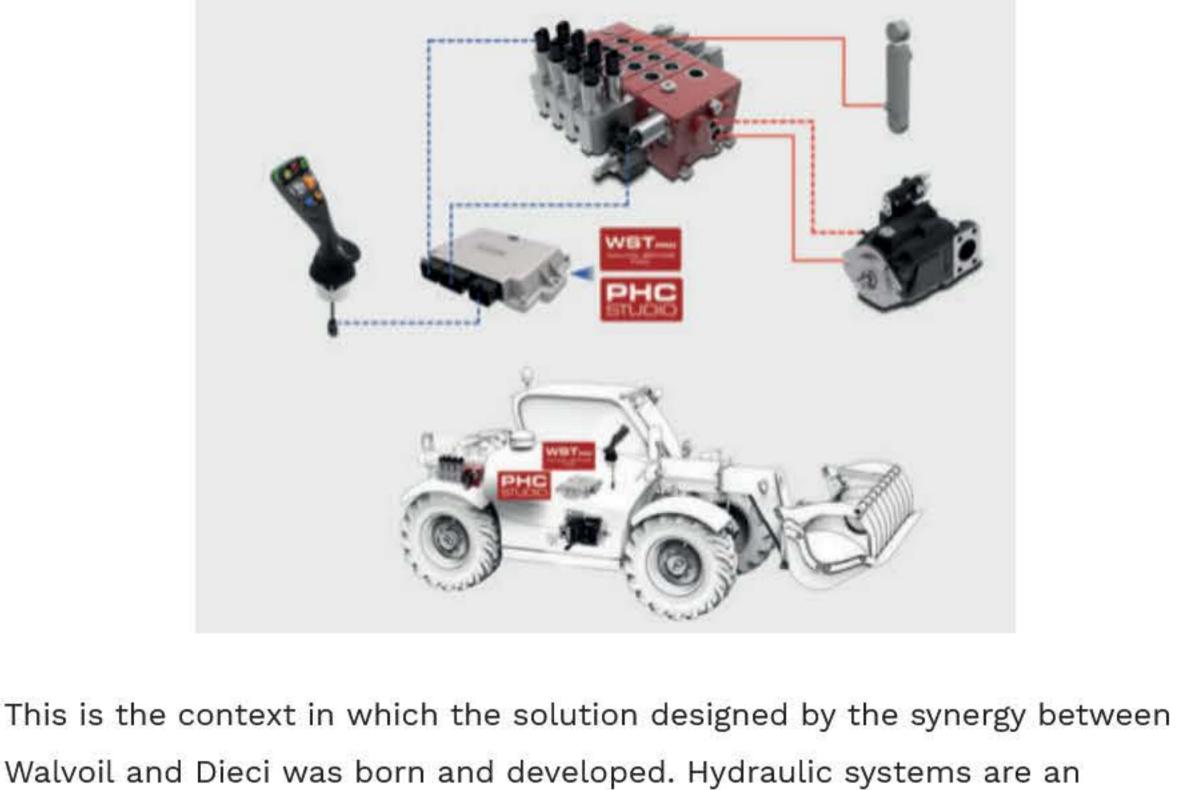

essential part of the most modern and widespread agricultural machinery, especially for telehandlers, which have now become irreplaceable for most companies. In order to ensure the simultaneous control of movements in these systems, the hydraulic pump generates a pressure higher than what is really necessary, a predetermined value called "Stand-by pressure differential" which has been considered acceptable until now, but which implies a considerable loss of energy, limiting the overall performance of the vehicle and unnecessarily increasing wear and consumption to the detriment of efficiency and environmental impact.

To give a solution to this problem, Walvoil has created the Adaptive Load Sensing, a system, patent pending, able to modulate the "Stand-by"

automatically varying it only when and how required. In partnership with Dieci, the ALS system has been successfully tested on an Agriplus telehandler, one of the top machines in the Dieci range for Agriculture.

Safety and stability are among the other advantages

ALS is made of a directional control valve, an electronic joystick, and an

electronic control unit, with customizable modular software developed by

Walvoil. The control unit collects information from the operations on the

controls and from the machine sensors, and acts on the Load Sensing

pressure" value according to the real working needs of the machine,

device, adapting the hydraulic pressure differential to the maximum efficiency value required by the vehicle.

The differential pressure value can also be selected by means of two push buttons on the joystick, the "Precision Function", which increases the movement controllability and precision, and the "Boost Function", which

increases the pressure value for a higher movement speed without need to install pumps with higher flow rates. During the tests, the Walvoil-Dieci Technical Team found on the Agri Plus a drop in energy dispersion values equal to 28% during boom operations, and up to 45% during traveling phases, with a significant improvement in the overall machine performance at various speeds.

The tests highlighted also further important advantages:

• First of all in terms of **safety**: by acting directly on the hydraulic signal,

signal.

Furthermore, in case of failures, the original operation is automatically restored, avoiding machine downtime.

the ALS avoids the functional complexity associated with the digital

 Then in terms of stability: the control of the pressure value allows to improve the machine stability, with a consequent more comfortable use.

• And finally, in terms of modernization: the few elements of the ALS kit

can be easily installed even on older telehandlers, extending their operational life and improving their performance.

The development of the ALS system takes advantage of the collaboration of Tasc, "Smart and Clean Agricultural Tractors Project", a project including the participation of the main university research laboratories of the Emilia Romagna Region – Italy, created with the aim of minimizing the environmental impact of agricultural mechanization.

Source: Walvoil